


Stand Installation

This modular stand has bolted joints at point A and B. These joints are bolted together with 1/4-20" nuts and bolts.


On the base plate, there are 4 mounting holes. GoToKiosk recommends that this unit is mounted to the ground using these holes using LDT-type anchors that are designed for the specific floor.

Recommended Anchor Specs:
3/8" x 3"

(Anchors are not provided)

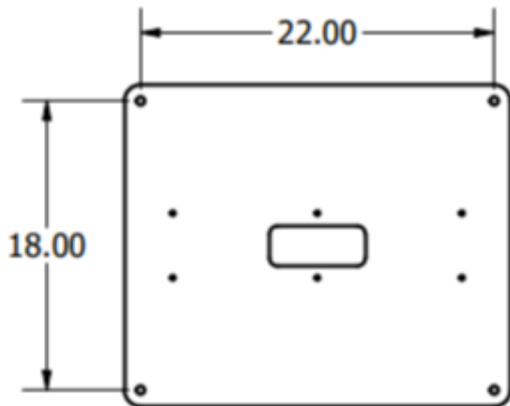

BASE PLATE MOUNTING DIMENSIONS

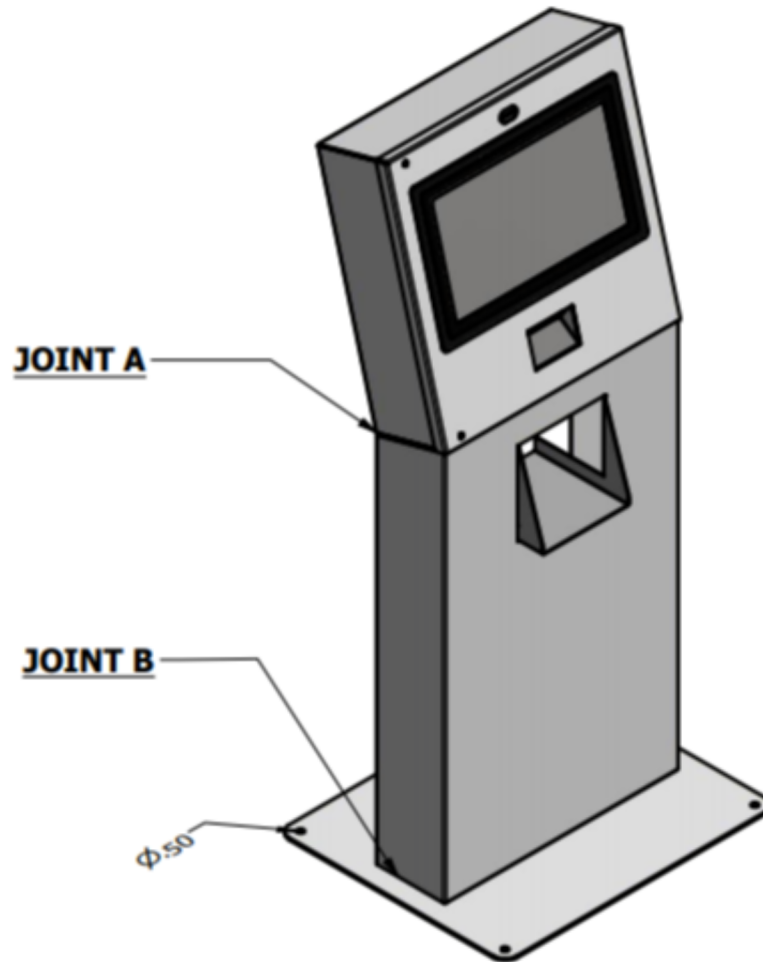

Though the kiosk can stand freely without being bolted down, **it can wobble and/or fall over and cause injury/damage. IT IS RECOMMENDED that the end installer bolts the mounting plate to the ground using the 1/2" mounting holes.**

GoToKiosk is not liable for any injuries if the unit is rocked/wobbled/falls and causes any damages to property or injuries any person/animal/etc. when the unit is not fastened to the recommended specification.